

Tactical Telescopic  
Transportable Mast

"3TM"

SPEED

MOBILITY

VERSATILITY

DEPENDABILITY

True mobility in the fast-moving technological world demands speed, reliability and versatility. Computer designed and modeled for compact mobility and rapid deployment from 2 to 15 meters, every component is precision engineered for maximum performance and durability. Machined from super light alloys and corrosion-free materials, even in the harshest environments it's light, fast, maintenance-free, rugged and reliable.

The Series 3TM II is the ultimate in versatility. Multiple devices can be easily mounted and elevated in a variety of configurations with up to 8 feet of adjustable vertical or horizontal separation with complete directional control. No matter what the application, the 3TM Series II quickly adapts to elevate any solution.

When it's time to perform, reach for the 3TM .



54 x 14 x 14 Wheeled Carry Bag for Easy Transport



Model	5 Meter	10 Meter	15 Meter
Part Number	BSM2-M-M105-AL1-000	BSM2-M-M110-AL1-000	BSM2-M-M115-AL1-000
Deployment Height	16.5 ft.	31.5 ft.	46.5 ft.
Travel Dimensions	54 x 14 x 14	54 x 14 x 14	54 x 14 x 14
Mast & Tripod Weight	23.71 lbs.	31.92 lbs.	41.23 lbs.
Accessory Weight	27.22 lbs.	33.49 lbs.	33.80 lbs.
Total Weight w/ Bag	50.43 lbs.	66.64 lbs.	76.26 lbs.
Deployment Load	45 lbs.	30 lbs.	10 lbs.
Wind Survival Rating*	70 mph	70 mph	70 mph
Deployment Time 1 person	3 Minutes	10 Minutes	15 Minutes
Deployment Time 2 people	2 Minutes	6 Minutes	7.5 Minutes
Directional Control	Yes	Yes	Yes
Corrosive Free	Yes	Yes	Yes
Finish	Black Anodized	Black Anodized	Black Anodized
Outside Diameter	2 inches	2 inches	2 Inches
Winching System Available	Yes	Yes	Yes

\* Secondary Guying greatly increases the stability, long term operational safety and wind loading of the mast system.

## Genuine 3TMast Accessories


Custom Mount Design and Fabrication Available

### Bolt On Kits

Bolts to Top of Mast

### Compression Kits

Attaches Anywhere on Mast

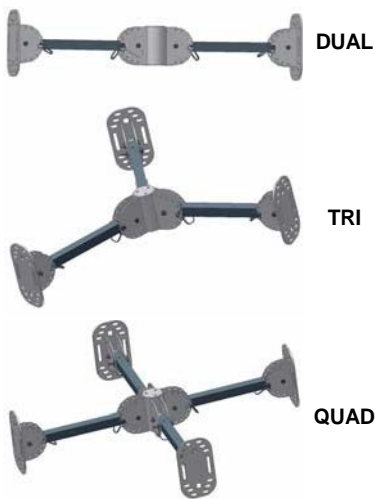

Variable Length Arms - 12, 24, 36 and 48 Inch Arms that can be adjusted both Vertically and Horizontally, providing up to 8 feet of Separation between devices.



Mount - Side Arm - NATO  
BSM2-P-M305-NTO-EM0



Mount - Side Arm - Boltster Plate  
BSM2-P-A101-BOL-EM0




Mount - Side Arm - Cup Holder  
BSM2-P-A100-CUP-EM0



Mounting Plate - Radar  
BSM2-A-M400-MPP-RDR



Winching System - Dual 24  
BSM2-K-W224-WCH-AL1

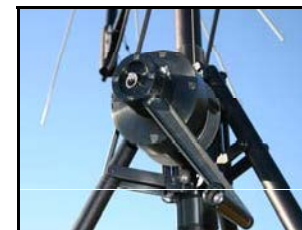

Mounting Adapter OE254  
BSM2-A-M400-MPA-OE2

